


1 2 3 4 5 6 7 8 9

G

G

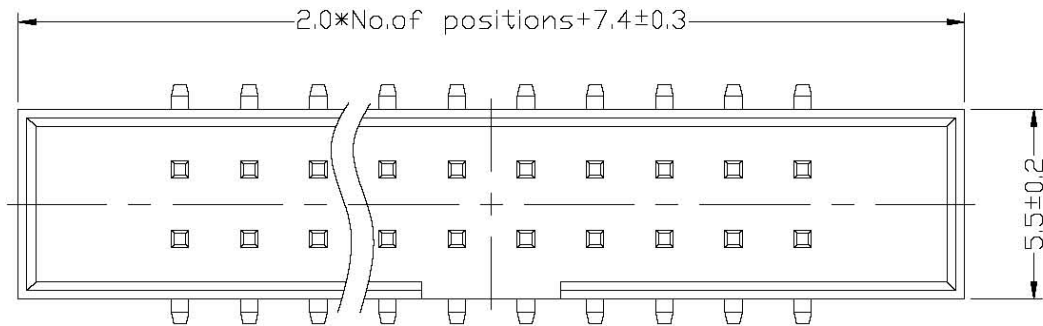

**SPECIFICATIONS**




- Current Rating: 1.5Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance: 20mΩ Max
- Withstanding Voltage: AC 500V
- Operation Temperature: -40°to+ 105°
- Contact Material: Brass
- Insulator Material: Polyester(UL 94V-0)
- Standard: Nylon-6T
- Max. Processing Temp: 240° C for30-60seconds  
(260° C for10seconds)

F

F

E

E

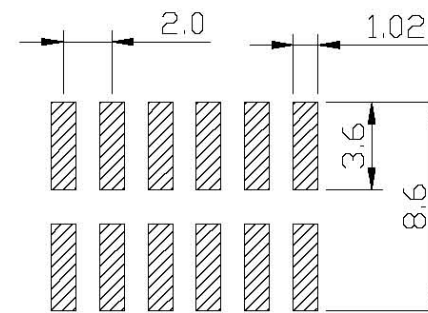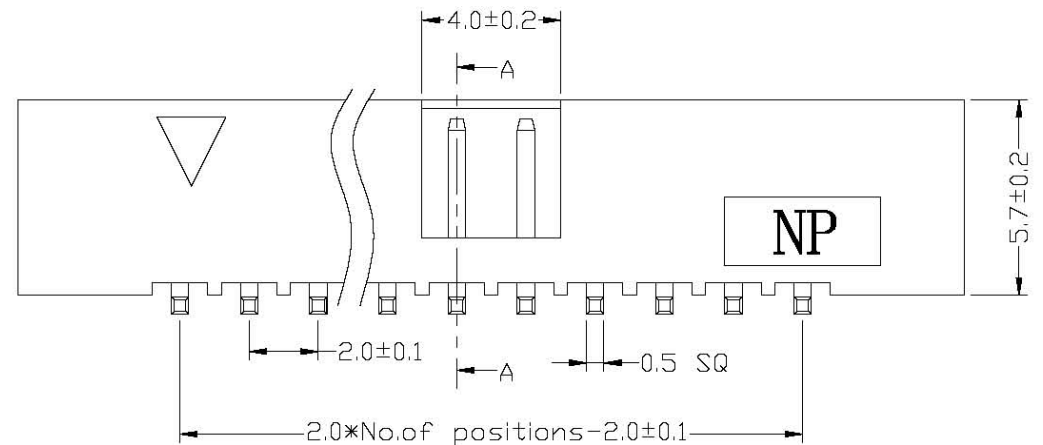

Recommended P.C.B Hole Layout

A - A

C

C

B

B

检验以此为准

UNLESS OTHEWIXE SPECIFIED TOLERANCE			
x.	±0.3	x.*	±5°
x.x	±0.2	x.x*	±1°
x.xx	±0.1	x.xx*	±0.5°
SCALE		UNIT	
		mm	
DRAWN		18/10/08	
LI BEI LIN			
CHECKED			
APPROVED		/ /	
SIZE		REV	
A4		A	

SHINHWA TECH.,CO LTD

DRAWM NAME  
2.0mm DC3

PROUCT NO.  
PILE NAME:

A

A

2.0DC3 2\*nPin SMT

1 2 3 4 5 6 7 8 9